

Ordering Information

0.018" Guidewire series

Catheter Length A:50cm; B:90cm; C:130cm	Balloon Diameter	Balloon Length	Compatible Introducer Sheath
DKT18-4020A/B/C	4.00mm	20mm	6Fr
DKT18-4040A/B/C		40mm	
DKT18-4060A/B/C		60mm	
DKT18-4080A/B/C		80mm	
DKT18-5020A/B/C	5.00mm	20mm	
DKT18-5040A/B/C		40mm	
DKT18-5060A/B/C		60mm	
DKT18-5080A/B/C		80mm	
DKT18-6020A/B/C	6.00mm	20mm	
DKT18-6040A/B/C		40mm	
DKT18-6060A/B/C		60mm	
DKT18-6080A/B/C		80mm	
DKT18-7020A/B/C	7.00mm	20mm	7Fr
DKT18-7040A/B/C		40mm	
DKT18-7060A/B/C		60mm	
DKT18-7080A/B/C		80mm	
DKT18-8020A/B/C	8.00mm	20mm	
DKT18-8040A/B/C		40mm	
DKT18-8060A/B/C		60mm	
DKT18-8080A/B/C		80mm	

0.035" Guidewire series

Catheter Length A:50cm; B:90cm; C:130cm	Balloon Diameter	Balloon Length	Compatible Introducer Sheath
DKT35-4020A/B/C	4.00mm	20mm	6Fr
DKT35-4040A/B/C		40mm	
DKT35-4060A/B/C		60mm	
DKT35-4080A/B/C		80mm	
DKT35-5020A/B/C	5.00mm	20mm	
DKT35-5040A/B/C		40mm	
DKT35-5060A/B/C		60mm	
DKT35-5080A/B/C		80mm	
DKT35-6020A/B/C	6.00mm	20mm	
DKT35-6040A/B/C		40mm	
DKT35-6060A/B/C		60mm	
DKT35-6080A/B/C		80mm	
DKT35-7020A/B/C	7.00mm	20mm	7Fr
DKT35-7040A/B/C		40mm	
DKT35-7060A/B/C		60mm	
DKT35-7080A/B/C		80mm	
DKT35-8020A/B/C	8.00mm	20mm	
DKT35-8040A/B/C		40mm	
DKT35-8060A/B/C		60mm	
DKT35-8080A/B/C		80mm	

- Nominal Pressure (NP): 8atm (All Models)
- Rated Burst Pressure (RBP): 20atm (All Models)



DK Medical Technology Co.,Ltd.

+86-512-81880801
cs@dkmedtech.com
https://en.dkmedtech.com
Unit #5 Xinhong Park, No. 9 West Suhong Road, Suzhou



D•Kutting™

PTA Scoring Balloon

FDA: K232207

CE: M.2025.MDR.1062




Aquilant
A HC21 Company

csuk@hc21.group
01256 306506
healthcare21.eu


● **Triangular Scoring Elements**

High focused force for effective dilatation

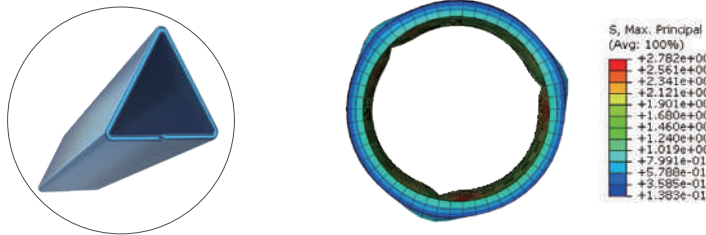

● **Scoring Elements Distributed at 120° Intervals**

Focused, uniform & controlled dissection

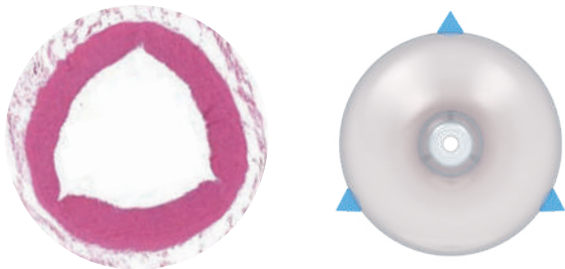


● **Comprehensive Product Range**

Addresses more lesion types

Guidewire compatibility	Balloon Diameter (mm)	Balloon nominal length (mm)	Effective Catheter Length (cm)
0.018	4/5/6/7/8	20/40/60/80	50/90/130
0.035	4/5/6/7/8	20/40/60/80	50/90/130


● **High Crossability**

Patented nitinol coiled wire technology ensures superior crossability even in tortuous vessels

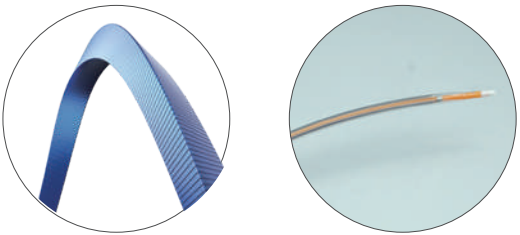

● **Excellent Flexibility**

Conforms to vessel curvature

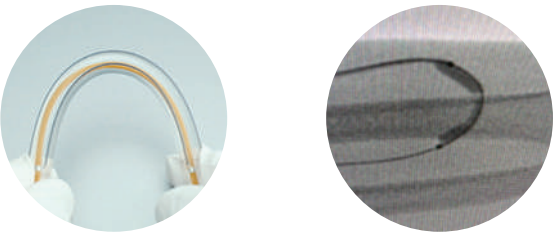

● **High RBP**

Improved dilation success rate & lumen gain

